
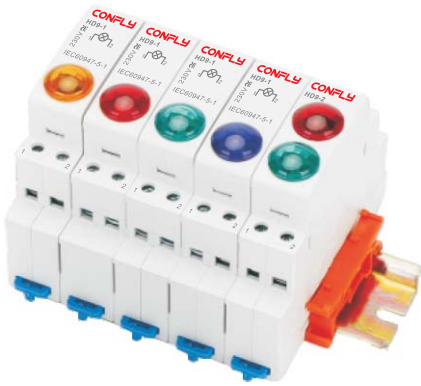


Modular Signal Lamp

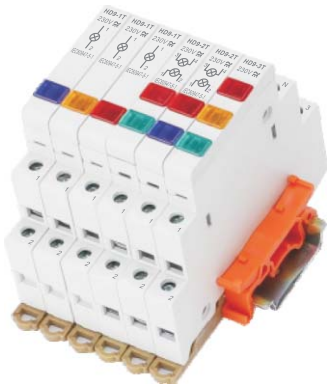

Application

The Modular Signal Lamp is applicable to circuit with rated voltage 230V AC/DC and frequency 50/60Hz for visual indication and signaling.

Construction and Feature

- Low service duration, minimum power consumption
- Compact design in modular size
- Easy installation

Technical Data

- Standard: IEC60947-5-1
- Illumination: LED
- Rated voltage: 24V AC/DC, 230V AC/DC
- Rated frequency: 50/60Hz
- Colour
 - 1P: red, yellow, blue, green, white
 - 2P: red+green
 - 3P with rectangular lamp: red+yellow+green
 - For 2P and 3P: other colours can be customized.
- Continual working life: 30,000 hours
- Connection terminal: pillar terminal with clamp
- Connection capacity: rigid conductor 2.5mm²
- Installation:
 - On symmetrical DIN rail

Overall & Installation Dimensions

